

DURANGO

GOLD



DURANGO GOLD CONSTRUCTION



TOWING HITCH

2" Towing Receiver w/ 4 Pin Wire Harness Connection (3,000 lb. Tow Rating & 300 lb. Hitch Rating)



MORRYDE CUSHIONED PIN BOX



- > 17.5" Uniroyal H-Rated Tires with 8 Lug Aluminum Wheels
- > MORryde Rubber Cushioned FW Pin Box
- > MORryde 4-step StepAbove RV Entry Steps
- > MORryde Power Cord Reel
- > RoadTech TPMS with Banded Sensors on the rim and Monitor Screen



FULLY VENTED ATTIC SYSTEM with DUAL VENTS



DICOR TUFFLEX PVC ROOF MEMBRANE w/ LIFETIME WARRANTY & WALKABLE ROOF



17.5" Uniroyal H-Rated Tires w/ 8-Lug Heavy-Duty Aluminum Rims



CURT Touring Coil Spring Suspension with 8 Shocks and Anti-Lock Brakes.



Reduces road shock into the frame by **50%**



- > (2) 200W Panels
- > 30A MPPT Solar Charge Controller with MPPT Remote Panel
- > 2,000W Pure Sine Wave Inverter making all electrical outlets "Live"

BOONDOCKER SOLAR PACKAGE (OPTIONAL)



ON-DEMAND TANKLESS WATER HEATER

COMFORT


40,000 BTU FURNACE

40" FIREPLACE

HEATED UNDERBELLY
Dedicated heat ducts in the underbelly and storage bay.

3 - 15K DUCTED HEAT PUMP A/Cs

RACETRACK DUCTING with QUIET COOL DUCTING
Uninterrupted airflow from front to back

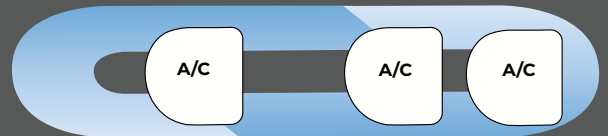

ALL WEATHER INSULATION PACKAGE
Feel the Difference.


- THERMAL ROOF** R-38*
Layer of fiberglass insulation, layer of radiant foil, and Dicor PVC membrane. All layers extend the full length of the roof. Vented attic allows condensation to escape.
- FULLY LAMINATED SIDEWALLS** R-13*
Sidewalls, rear wall, slideroom end walls, and slideroom roof are all welded aluminum framed and laminated with foam insulation.
- INSULATED MAIN FLOOR** R-38*
5/8" Tongue & Groove plywood floor, lined with fiberglass insulation layer and a layer of radiant foil insulation.
- INSULATED FRONT WALLS** R-38*
Welded aluminum framed, fiberglass insulation, layer of radiant foil, and laminated.

- ENCLOSED UNDERBELLY**
Woven poly stranded material barrier is wrapped around the edges and securely stapled to the framing, adding an extra layer of moisture protection.
- INSULATED HEAVY DUTY BAGGAGE DOORS**
Insulated with foam.

*CALCULATED R VALUE

STRENGTH OF FRAME - CHASSIS

Steel Powder Coated Drop Frame
2" Torsion Tube Welded



KEY FEATURES



STARLINK PREP from WINEGARD



SQUARE FRAMELESS WINDOWS



ALL PEX PLUMBING & SHUT-OFF VALVES



BALTIC BIRCH DOVETAIL DRAWER BOXES



TRIPLE STAGE FILTRATION SYSTEM



OVERSIZED CABINET DOORS W/HIDDEN HINGES




G384MSQ Shown in Pebble Décor



G384MSQ Shown in Pebble Décor


G310RLQ

UVW: 12,740 | Exterior Length: 34' 11" | Sleeps: 4

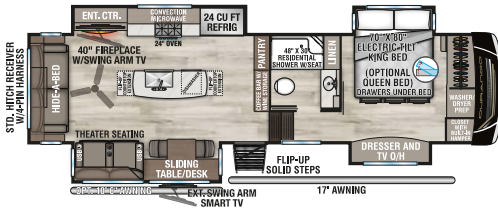


G312MLQ - NEW

UVW: TBD | Exterior Length: 34' 11" | Sleeps: 4

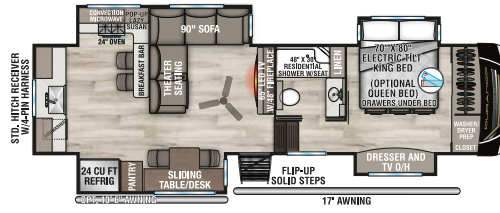


G359ROQ

UVW: 14,720 | Exterior Length: 41' 8" | Sleeps: 4

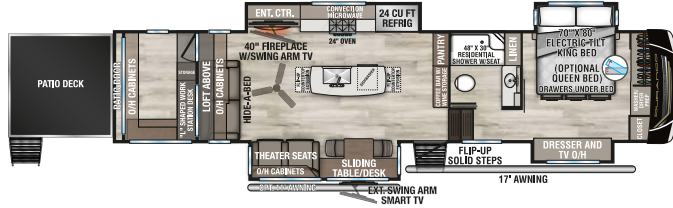


G366FBQ

UVW: 13,740 | Exterior Length: 40' 5" | Sleeps: 4

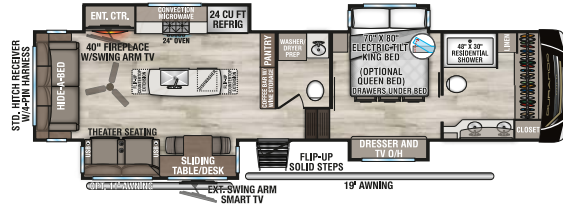


G382MBF

UVW: 15,430 | Exterior Length: 42' 5" | Sleeps: 8

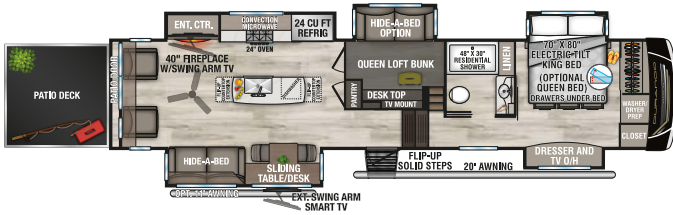


G384MSQ

UVW: 14,720 | Exterior Length: 42' 3" | Sleeps: 4

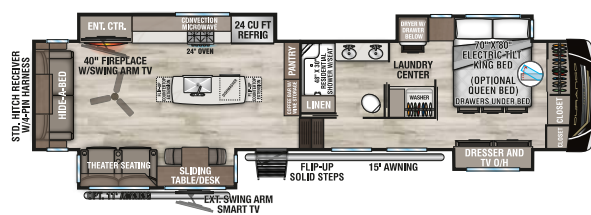


G388FLS

UVW: 15,330 | Exterior Length: 42' 11" | Sleeps: 6

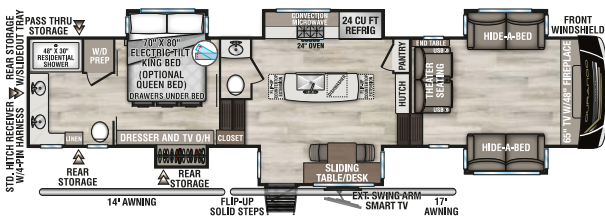


G390MLQ

UVW: 14,340 | Exterior Length: 42' 5" | Sleeps: 4

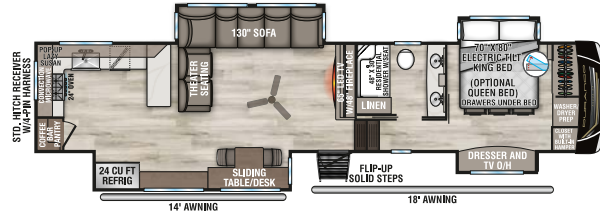

G393MKF

UVW: 14,370 | Exterior Length: 42' 11" | Sleeps: 6

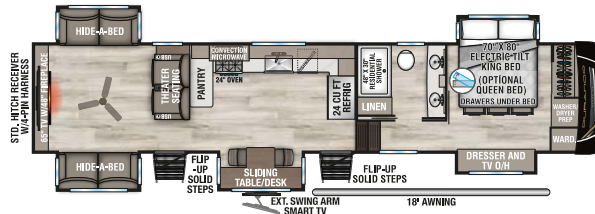

G384MSQ Shown in Pebble Décor



G384MSQ Shown in Pebble Décor

DURANGO GOLD SPECIFICATIONS

	G310RLQ	G312MLQ	G359R0Q	G366FBQ	G382MBF	G384MSQ	G388FLS	G390MLQ	G393MKF
UVW (Unloaded Vehicle Weight)*	12,740	TBD	14,720	13,740	15,430	14,720	15,330	14,340	14,370
Dry Hitch Weight*	2,640	TBD	3,060	2,650	2,860	2,950	3,110	2,670	2,880
Dry Axle Weight*	10,100	TBD	11,660	11,090	12,570	11,770	12,220	11,670	11,490
CCC (Cargo Carrying Capacity)	3,760	TBD	3,275	3,760	2,565	3,275	2,665	3,160	3,130
GVWR	16,500	TBD	17,995	17,500	17,995	17,995	17,995	17,500	17,500
Interior Height	80"	TBD	80"	80"	80"	80"	80"	80"	80"
Exterior Height (with A/C)	13' 6"	13' 6"	13' 6"	13' 6"	13' 6"	13' 6"	13' 6"	13' 6"	13' 6"
Exterior Width	101"	101"	101"	101"	101"	101"	101"	101"	101"
Exterior Length**	34' 11"	34' 11"	41' 8"	40' 5"	42' 5"	42' 3"	42' 11"	42' 5"	42' 11"
Refrigerator (Cubic Feet)	24	24	24	24	24	24	24	24	24
Water Heater Cap. (On-Demand Tankless)	***	***	***	***	***	***	***	***	***
Fresh Water Cap. (Gal.)	76	76	76	76	76	76	76	76	76
Waste Water Cap. (Gal.)	50	50	50	50	50	50	50	50	50
Gray Water Cap. (Gal.)	90	90	90	90	90	90	90	90	90
1/2 Bath Cap. (Gal.)	N/A	N/A	N/A	50	N/A	N/A	50	N/A	N/A
LP Gas Cap. (Lbs.)	60	60	60	60	60	60	60	60	60
Furnace BTUs (1,000s)	40	40	40	40	40	40	40	40	40
Axle Size w/CURT Susp.	8,000	8,000	8,000	8,000	8,000	8,000	8,000	8,000	8,000
Tire Size	17.5"	17.5"	17.5"	17.5"	17.5"	17.5"	17.5"	17.5"	17.5"
Awning	17'/10' 6" opt.	17'/10' 6" opt.	17'/11' opt.	19'/11' opt.	20'/11' opt.	15'/11' opt.	17'/14'	18'/14'	18'

* This weight reflects the rolling average unit weight for each model. Your trailer weight will vary according to optional equipment.

** Exterior length is measured from rear of bumper to leading edge of coupler.

*** Infinite supply.



Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error on this website. Some items shown are not included as standard or optional equipment.

Dealer:



985 N 900 W • Shipshewana, IN 46565

E-mail kz@kz-rv.com • www.kz-rv.com

©2026 | 07/31/2026