

DURANGO

HT



KZ
RECREATIONAL
VEHICLES

DURANGO HT CONSTRUCTION



TOWING HITCH

2" Towing Receiver w/ 4 Pin Wire Harness Connection (3,000 lb. Tow Rating & 300 lb. Hitch Rating)



DICOR TUFFLEX PVC ROOF MEMBRANE W/ LIFETIME WARRANTY & WALKABLE ROOF



16" Uniroyal Tires w/ 8-Lug Heavy-Duty Aluminum Rims



CURT Touring Coil Spring Suspension with 4 Shocks and Anti-Lock Brakes.



Reduces road shock into the frame by **50%**



- > 16" Uniroyal Tires with 8 Lug Aluminum Wheels
- > MORryde 4-step StepAbove RV Entry Steps
- > MORryde SafeT Handrail
- > RoadTech TPMS with banded sensors on the rim and monitor screen



FULLY VENTED ATTIC SYSTEM W/ DUAL VENTS



60K ON-DEMAND TANKLESS WATER HEATER



ALL WEATHER INSULATION PACKAGE
Feel the Difference.

- THERMAL ROOF** R-38*
Layer of fiberglass insulation, layer of radiant foil, and Dicor PVC membrane. All layers extend the full length of the roof. Vented attic allows condensation to escape.
- FULLY LAMINATED SIDEWALLS** R-13*
Sidewalls, rear wall, slideroom end walls, and slideroom roof are all welded aluminum framed and laminated with foam insulation.
- INSULATED MAIN FLOOR** R-38*
5/8" Tongue & Groove plywood floor, lined with fiberglass insulation layer and a layer of radiant foil insulation.
- INSULATED FRONT WALLS** R-38*
Welded aluminum framed and laminated with fiberglass insulation.

*CALCULATED R VALUE



STRENGTH OF FRAME - CHASSIS

Steel Powder Coated I-Beam
2" Torsion Tube Welded

- ENCLOSED UNDERBELLY**
Woven poly stranded material barrier is wrapped around the edges and securely stapled to the framing, adding an extra layer of moisture protection.
- INSULATED HEAVY DUTY BAGGAGE DOORS**
Insulated with foam.

COMFORT

35,000 BTU FURNACE

15K DUCTED A/C
Optional 2nd A/C


40" FIREPLACE

HEATED UNDERBELLY
Dedicated heat ducts in the underbelly and storage bay.

RACETRACK DUCTING with RV AIRFLOW
Uninterrupted airflow from front to back



40%
More Efficient and Quieter A/C System

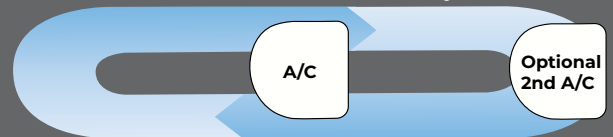

KEY FEATURES



STARLINK PREP
from WINEGARD



SQUARE
FRAMELESS
WINDOWS



ALL PEX
PLUMBING & SHUT-
OFF VALVES



DOVETAIL
DRAWER BOXES



WATER FILTRATION
SYSTEM



OVERSIZED
CABINET DOORS W/
HIDDEN HINGES




D286BHD Shown in Mink Décor



D286BHD Shown in Mink Décor


D230RDD - NEW

UVW: TBD | Exterior Length: 29' | Sleeps: 5

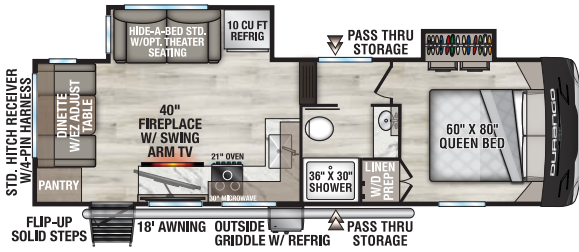


D232MLD

UVW: 8,350 | Exterior Length: 29' | Sleeps: 5

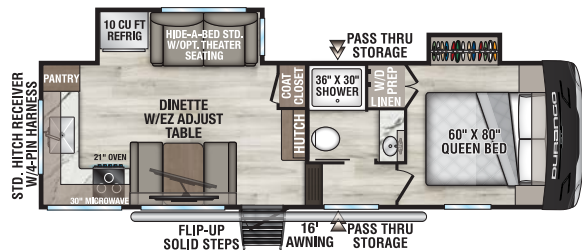


D250RST - NEW

UVW: TBD | Exterior Length: 29' 4" | Sleeps: 5

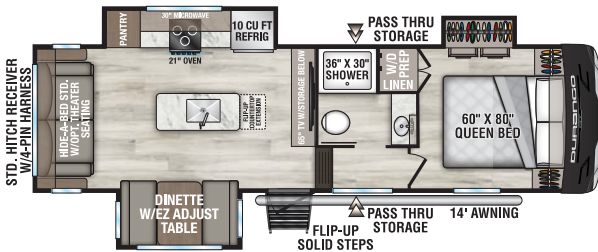


D256RKT

UVW: 9,490 | Exterior Length: 33' 3" | Sleeps: 5

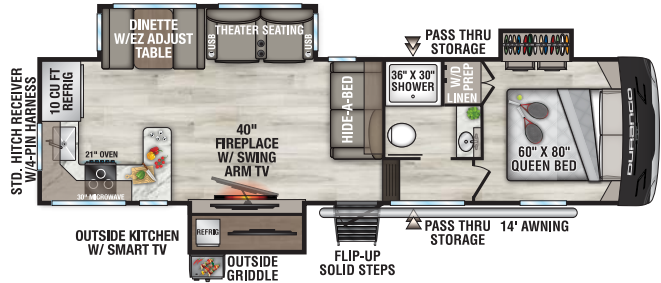


D283RLT

UVW: 9,490 | Exterior Length: 32' 11" | Sleeps: 5

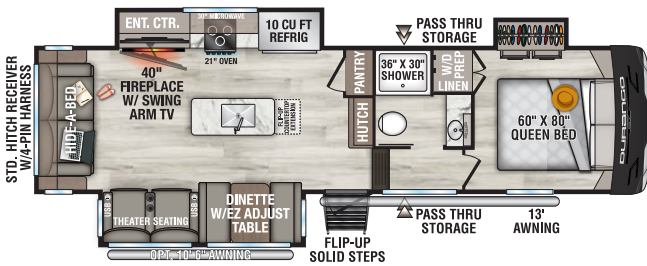


D286BHD

UVW: 9,400 | Exterior Length: 33' 7" | Sleeps: 10

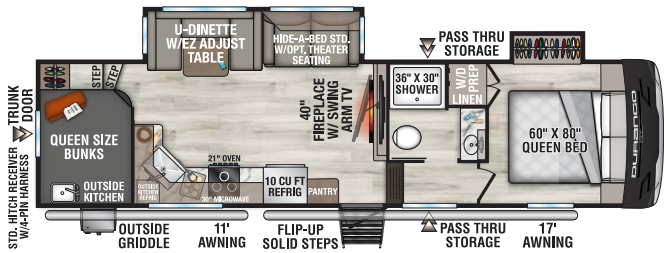


D290RLT

UVW: 9,850 | Exterior Length: 34' 5" | Sleeps: 6

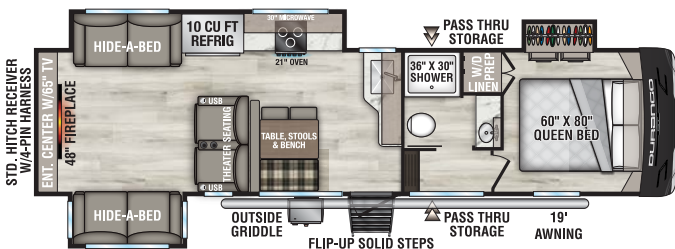

D296BHT

UVW: 10,040 | Exterior Length: 35' | Sleeps: 9

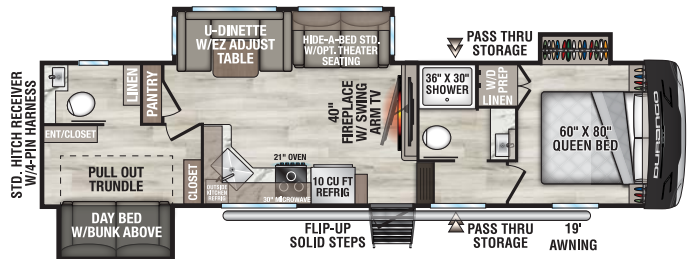

D290RLT Shown in Pebble Décor



D290RLT Shown in Pebble Décor

DURANGO HT SPECIFICATIONS

	D230RDD	D232MLD	D250RST	D256RKT	D283RLT	D286BHD	D290RLT	D296BHT
UVW (Unloaded Vehicle Weight)*	TBD	8,350	TBD	9,490	9,490	9,400	9,850	10,040
Dry Hitch Weight*	TBD	1,370	TBD	1,590	1,620	1,650	1,610	1,620
Dry Axle Weight*	TBD	6,980	TBD	7,900	7,870	7,750	8,240	8,420
CCC (Cargo Carrying Capacity)	TBD	2,150	TBD	2,010	2,010	2,100	2,145	1,955
GVWR	TBD	10,500	TBD	11,500	11,500	11,500	11,995	11,995
Exterior Height (with A/C)	TBD	12' 3"	TBD	12' 4"	12' 4"	12' 5"	12' 3"	12' 4"
Exterior Width	96"	96"	96"	96"	96"	96"	96"	96"
Exterior Length**	29'	29'	29' 4"	33' 3"	32' 11"	33' 7"	34' 5"	35'
Refrigerator (Cubic Feet)	10	10	10	10	10	10	10	10
Water Heater Cap. (On-Demand Tankless)	***	***	***	***	***	***	***	***
Fresh Water Cap. (Gal.)	55	55	55	55	55	55	55	55
Waste Water Cap. (Gal.)	50	50	50	50	50	50	50	50
Gray Water Cap. (Gal.)	50	90	50	90	50	90	50	90
LP Gas Cap. (Lbs.)	60	60	60	60	60	60	60	60
Furnace BTUs (1,000s)	35	35	35	35	35	35	35	35
Axle Size w/CURT Susp.	5,200	5,200	5,200	5,200	5,200	5,200	6,000	6,000
Tire Size	16"	16"	16"	16"	16"	16"	16"	16"
Awning	18'	16'	14'	14'	13'/10' 6" opt.	17'/11' opt.	19"	19"

* This weight reflects the rolling average unit weight for each model. Your trailer weight will vary according to optional equipment.

** Exterior length is measured from rear of bumper to leading edge of coupler.

*** Infinite supply.



Due to continual research and advances, manufacturer reserves the right to change specifications, design, price, and equipment without notice, and assumes no responsibility for any error on this website. Some items shown are not included as standard or optional equipment.

Dealer:



985 N 900 W • Shipshewana, IN 46565

E-mail kz@kz-rv.com • www.kz-rv.com

©2026 | 07/31/2026