


NXG FRAME BY NORCO INDUSTRIES

N. GERANE

The Next Generation in RV Frame Technology

CONNECT | CONNECT SE

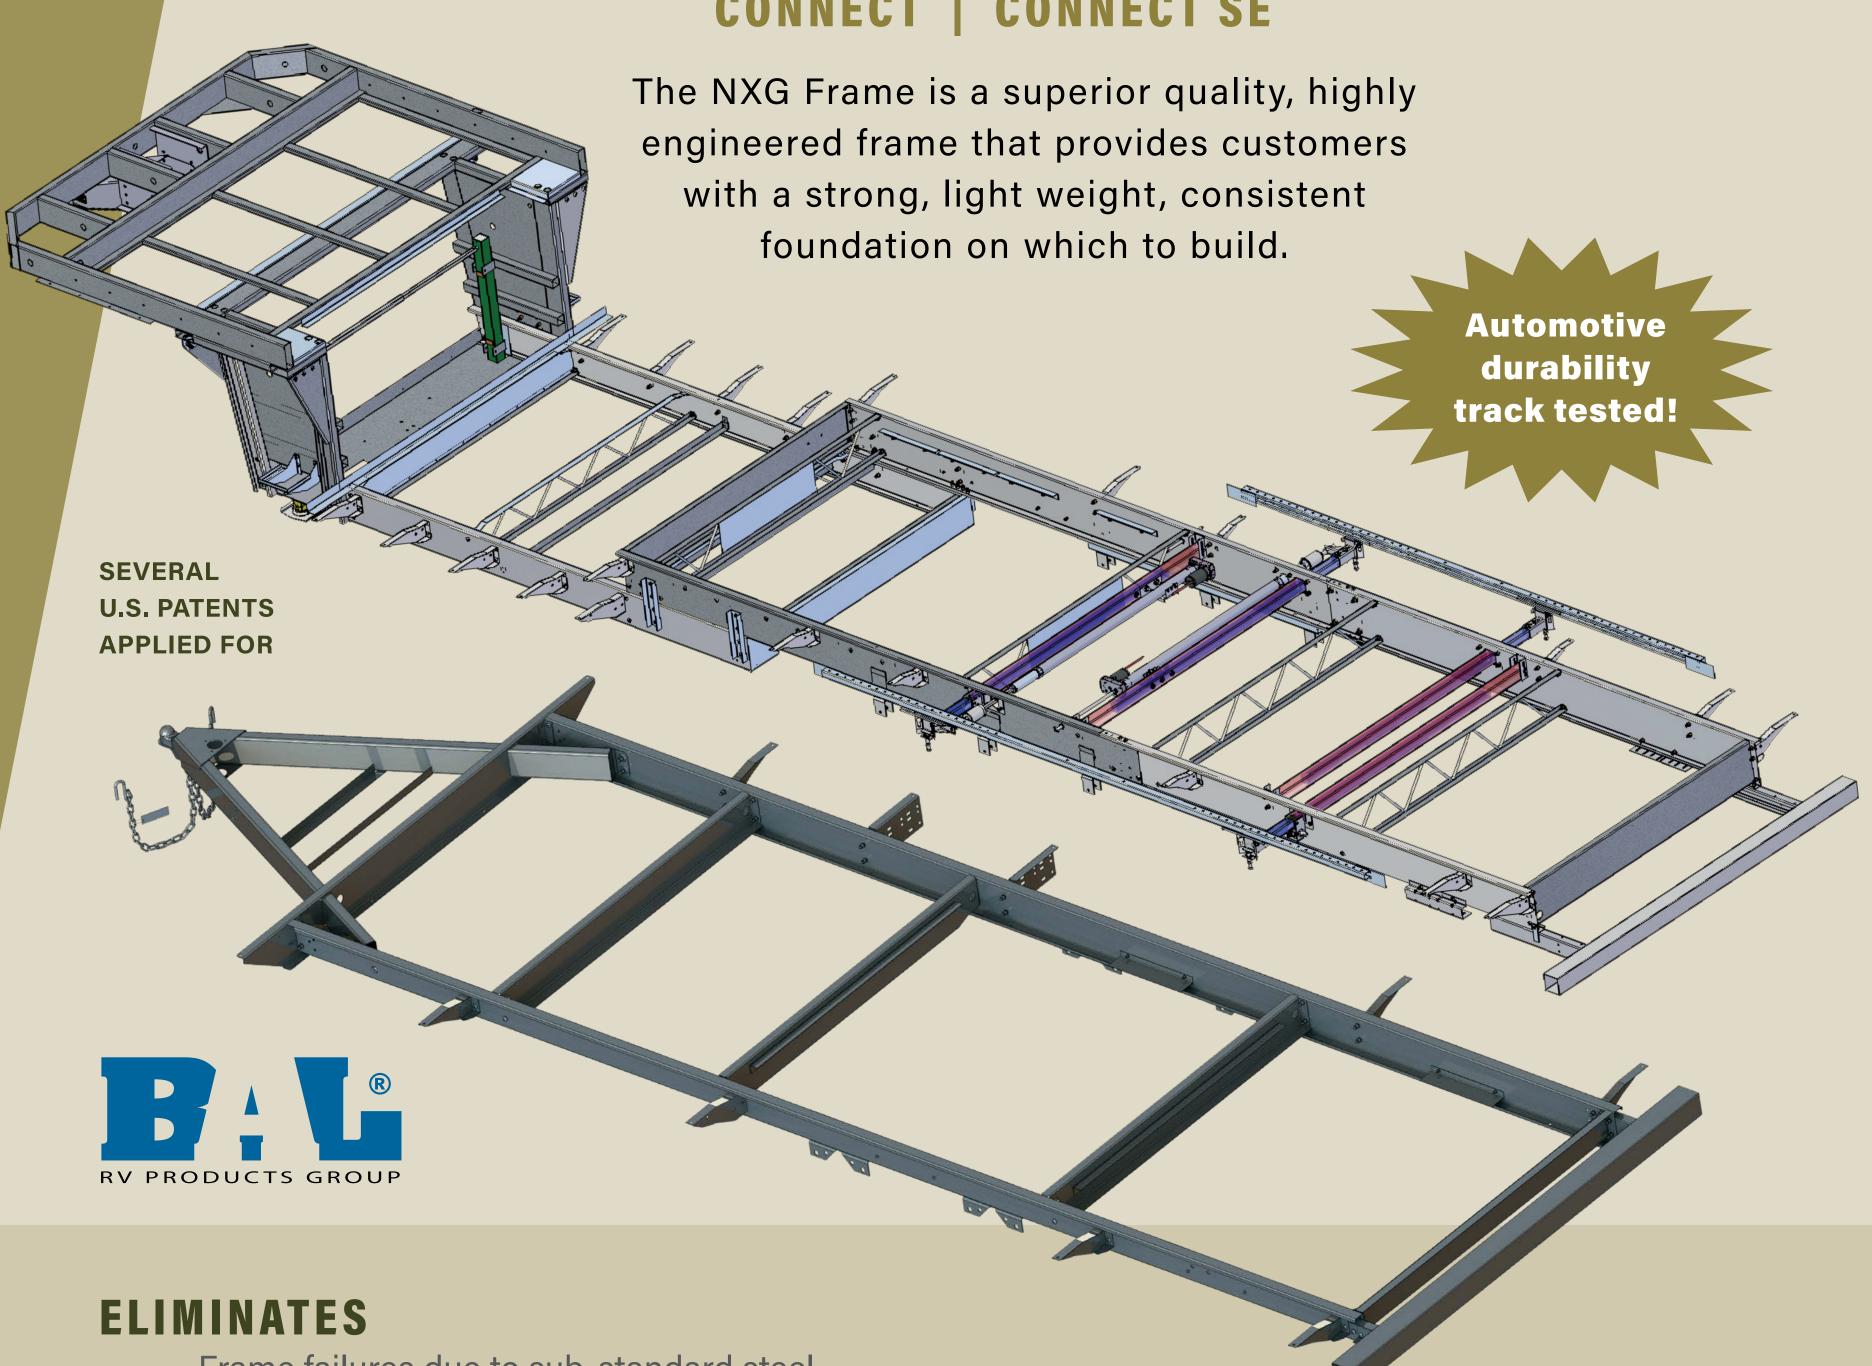

- Frame failures due to sub-standard steel
- Construction issues caused by improperly placed components
- Uneven main rails varying camber
- Corrosion caused by incomplete coverage due to painting of stacked frame assemblies
- Paint failures caused by inadequately washed components

KEY FEATURES

- Constructed with HSLA High Strength Low Alloy Prime Steel with specifically controlled properties.
- Designed to accommodate both fifth wheel and travel trailer configurations.
- CNC controlled rail fabrication allows placement of components precisely where the manufacturer wants them.
- Manual welding is minimized. Common components are robotically welded for consistent quality.
- All fastened components are joined with Huck® fasteners. Huck® fasteners provide consistent clamp load.
- CNC controlled camber.
- Designed with flush floor slideouts, ensuring no rise between slideout and main floor for easier movement throughout the unit.